


SIGNAL MOUNTING ASSEMBLIES

POLE CLAMP BRACKETS (6"- 9" Poles)




- *Designed for 6" - 9" Diameter Poles (N.J.D.O.T. "K")*
- *Cast from "443.0" Aluminum Alloy (36,000 Lb. Tensile Strength)*
- *Clamp Halves Grip Pole Securely*
- *Clamp Hub is Precision Tapped 1 1/2"-11 1/2 NPSM*
- *Bolts are Stainless Steel (Nuts & Washers too!)*
- *All Colors Available*

Please specify powder-coated finish when ordering.

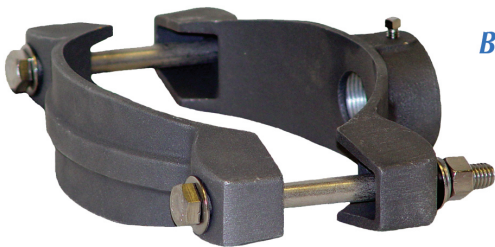

PC-6080

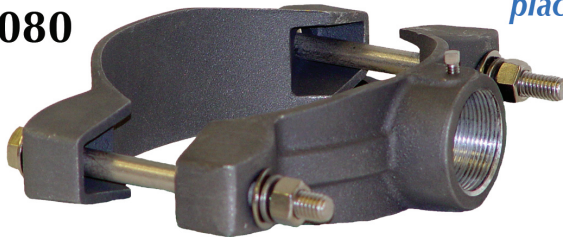

*Boo-Boo Kitty says,
"If your pole
needs a bracket
you came to
the right
place!"*



General Traffic's Pole Clamp Bracket Mounts are for those who prefer a compression type fit to anchor their signals to the pole. The PC-6080 allows for rapid installation of signal heads with reduced effort on the part of the installer. The PC-6080 will fit the 6"- 9" range diameter signal pole. Clamping bolts are Type 304 stainless steel and are 9.00" length.



**General
Traffic
Equipment
Corporation**

259 Broadway, Newburgh, NY 12550

(845) 569-9000

TOLL FREE:

(800) 222-2828

FAX:

(845) 569-1800

EMAIL:

info@generaltrafficequip.com

www.generaltrafficequip.com